
Rotary Hoist Frame





HST-600-750
HST-1000-750

Specification	Rated hanging weight (kg)	Rated lifting length (mm)	Qty/Ctn (PCS)	Packing size (cm)	G.W./N.W. (kg)
HST-250-1100	250	1100	4	86x22x20	33/32
HST-600-750	600	750	4	86x22x20	25/26
HST-1000-750	1000	750	4	86x22x20	38/37


Electric Wire Hoist(Extra Long Steel Wire)



18M
20M
22M

Model	Method of use	Rated load (kg)	Voltage (V)	Input power (W)	Lifting speed (m/min)	Lifting height (m)	Qty/Ctn (pcs)	Packing size (cm)	G.W./N.W. (kg)
HGS-B100-18 PA-200C	single-hook double-hook	100 200	220/230	480	10 5	18 9	2	47x37x16	24/22
HGS-B150-18 PA-300C	single-hook double-hook	150 300	220/230	600	10 5	18 9	2	47x37x16	25/23
HGS-B200-22 PA-400C	single-hook double-hook	200 400	220/230	750	10 5	22 11	2	52X44X17	36/34
HGS-B250-22 PA-500C	single-hook double-hook	250 500	220/230	900	10 5	22 11	2	52X44X17	37/35
HGS-B300-22 PA-600C	single-hook double-hook	300 600	220/230	1050	10 5	22 11	2	52X44X17	38/36
HGS-B350-22 PA-700C	single-hook double-hook	350 700	220/230	1200	10 5	22 11	2	52X44X17	39/37
HGS-B400-22 PA-800C	single-hook double-hook	400 800	220/230	1350	10 5	22 11	2	52X44X17	40/38
HGS-B500-20 PA-1000C	single-hook double-hook	500 1000	220/230	1600	10 5	20 10	2	52x44x17	66/64

Electric Windlass Series




KDJ-200E,KDL-250E
KDJ-300E,KDJ-300E1




KDJ-500E1,KDJ-750E1
KDJ-1000E1

Model	Load rated (kg)	Speed (m/min)	Motor (hp x p)	Voltage (v)	Frequency (Hz)	Lifting Height (m)	Steel cable (ϕmm x m)	N.W. (kg)	Percentage duty cycle
KDJ-200E	200	10-15 12-18	0.8X4	1-phase 120v,220v, 230v,240v	50 60	29	6X30	36	25% ED (150 times/h maximum starting frequency)
KDJ-250E	250	10-15 12-18	1.0X4		50 60	29	6X30	40	
KDJ-300E	300	10-15 12-18	1.5X4		50 60	29	7X30	49	
KDJ-300E1	300	10-15	1.5X4	3-phase 380v 415v	50	29	7X30	48	
KDJ-500E1	500	12-18	3.0X4		50	58	9X60	136	
KDJ-750E1	750	12-18	4.0X4		50	58	9X60	149	
KDJ-1000E1	1000	12-18	5.5X4		50	58	11X60	156	

Symbol	KDJ-200E	KDJ-250E	KDJ-300E	KDJ-300E1	KDJ-500E1	KDJ-750E1	KDJ-1000E1
A(mm)	4-ϕ10.5	4-ϕ10.5	4-ϕ10.5	4-ϕ10.5	4-ϕ16	4-ϕ15	4-ϕ15
B(mm)	142	142	172	172	400	400	400
C(mm)	142	142	142	142	330	330	300
D(mm)	510	525	540	548	922	935	935
E(mm)	210	210	210	210	372	372	372
F(mm)	246	246	246	246	430	430	430

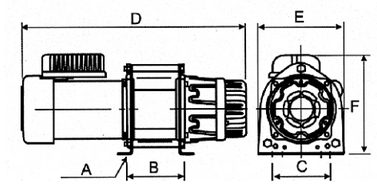



Model	Load rated (kg)	Speed (m/min)	Motor (hp x p)	Voltage (v)	Frequency (Hz)	Lifting Height (m)	Steel cable (ϕmm x m)	N.W. (kg)	Percentage duty cycle
KDJ-2200E1	2200	7-12.5	7.5X4	3-phase 380v 415v	50	97	16X100	450	25% ED (150 times/h maximum starting frequency)
KDJ-3200E1	3200	6.3-8.8	7.5X6		50	97	18X100	500	
KDJ-5000E1	5000	8.0-12	15X4		50	192	22.4X200	1500	
KDJ-10000E1	10000	7-11	30X4		50	235	32X250	3000	

Symbol	KDJ-2000E1	KDJ-3000E1	KDJ-5000E1	KDJ-10000E1
A (mm)	4-ϕ22	8-ϕ30	8-ϕ32	8-ϕ38
B (mm)	600	847	920	1600
C (mm)	499	680	680	1100
D (mm)	1160	1431	1860	2350
E (mm)	565	740	740	1200
F (mm)	658	860	905	1255

